
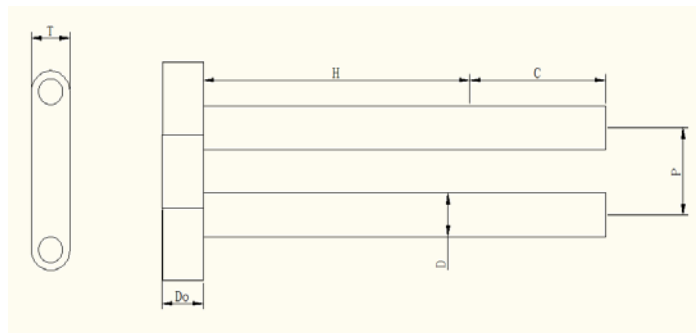


SU 型 SM 型 硅碳棒

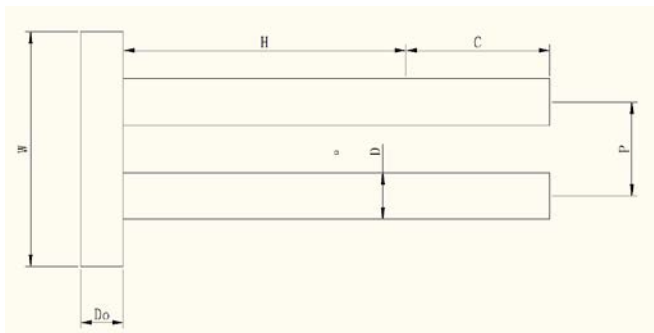

H-热部 hot zone length; C-冷端 cold end length

D-腿腿直径 leg diameter

Do-连桥直径 bridge diameter; W-连桥宽度 bridge width

P-腿距 Pitch



编号 Item No.	尺寸Size				热部面积 Hot Zone Surface Area	额定负载值			
	直径 Diameter	热部长 Hot Zone Length	冷端长 Cold End Length	桥距P Patch		Normal 电压 Voltage	Loading 功率 Power	Values 电阻 Resista nce	
	mm	mm	mm	mm		cm	Volts	Watts	Ohms
SU163030	16	20	300	40	301	121	4600	3.18	
SU164030			400		300	402	160	6080	4.21
SU164040			400		400	402	163	6190	4.29
SU165030			500		300	502	200	7600	5.26
SU203040			300		400	377	112	5990	2.09
SU203540			350		400	440	130	6960	2.43
SU204040			400		400	502	147	7870	2.75
SU204535			450		350	565	164	8770	3.07
SU205040			500		400	628	183	9790	3.42
SU205050			500		500	628	185	9900	3.46
SU206040			600		400	754	218	11700	4.07
SU206050			600		500	754	220	11800	4.11
SU207040			700		400	879	253	13500	4.73
SU207050			700		500	879	256	13700	4.79
SU208040			800		400	1005	289	15500	5.4
SU208050			800		500	1005	291	15600	5.44
SU254040	25	60	400	400	628	131	9370	1.83	
SU254050			400	500	628	133	9510	1.86	
SU254540			450	400	707	147	10500	2.06	
SU255040			500	400	785	103	11700	2.28	
SU255050			500	500	785	165	11800	2.31	
SU255540			550	400	864	179	12800	2.5	
SU256040			600	400	942	194	13900	2.71	
SU256050			600	500	942	196	14000	2.74	
SU257040			700	400	1099	226	16200	3.16	
SU257050			700	500	1099	220	16300	3.19	
SU258040			800	400	1256	258	18500	3.61	
SU桥接尺寸 SU Crossbar Size									
D	16	30	25	30	35				
Do	25	30	35	40	45				
W	76	80	110	125	140				

编号	尺寸Size				热部面积 Hot Zone Surface Area	额定负载值		
	直径 Diamete r	热部长 Hot Zone Length	冷端长 Cold End Length	桥距P Patch		Normal 电压 Voltage	Loading 功率 Power	Values 电阻 Resista nce
	mm	mm	mm	mm		cm	Volts	Watts
SU305040	30	500	400	70	942	148	13800	1.55
SU305050		500	500		942	149	13900	1.59
SU306040		600	400		11360	176	16500	1.88
SU306050		600	500		1130	178	16600	1.9
SU307040		700	400		1318	205	19200	2.19
SU307050		700	500		1318	207	19400	2.21
SU308040		800	400		1508	234	21900	2.5
SU308050		800	500		1508	236	22100	2.52
SU309040		900	400		1695	263	24600	2.81
SU309050		900	500		1695	265	24800	2.83
SU3010050		1000	500		1884	294	27500	3.14
SU356040	35	600	400	80	1319	180	19100	1.68
SU356050		600	500		1319	182	19100	1.7
SU357040		700	400		1539	210	22200	1.96
SU357050		700	500		1539	212	22400	1.98
SU358040		800	400		1758	240	25400	2.24
SU358050		800	500		1758	241	25600	2.26
SU359040		900	400		1978	270	28600	2.52
SU359050		900	500		1978	271	28800	2.54
SU3510050		1000	500		2108	301	32000	2.82
SM 接桥尺寸 SM Crossbar Size								
D	14	16	20	25	30	35		
T	14	16	20	25	30	35		
Do	14	16	20	25	30	35		

1) 额定负荷值是硅碳棒在空气中表面温度为 1000℃时测得, 标准电阻公差正负 15%

Nominal Loading Values are measured at a Heating Element surface temperature of 1000degC

2) 可生产最大尺寸: 直径 40mm, 热端长 1500mm, 总长 1800mm

Manufacturable Dimension is up to: Diameter 40mm, Hot zone 1500mm, Overall length 1800mm

3) 可依据要求生产特殊规格和特性以适应不同需求

Products with special shapes are manufactured upon customer's request.